

## DDS238-4 (B) single phase din rail type watt hour meter (D1401)



The meter is designed to measure single phase two wire AC active energy like residential, utility and industrial application. It is a long life meter with the advantage of high stability, high over load capability, low power loss and small volume.

### Basic Function

- ★ Mechanical step register 5+1
- ★ Bi-directional total active energy measurement, reverse active energy measure in the total active energy
- ★ Pulse LED indicates working of meter, Passive pulse output with optical coupling isolation
- ★ 35mm din rail installation

### Technical Data

Rate voltage	110V,120V,220V,230,240V
Working voltage range	0.8~1.2Un
Rate Current	1.5(6)A, 5(30)A, 10(40)A, 5(60)A, 10(100)A or other as required
Frequency	50Hz or 60Hz $\pm$ 10%
Connection mode	Direct type

**Noting : other voltage , current are also available . Other function also can be special design as customer requirement**


## DDS238-4 (B) single phase din rail type watt hour meter (D1401)

Display	mechanical step register
Accuracy class	1.0
Power consumption	<1W/10VA
Start current	0.004Ib
AC voltage withstand	4000V/25mA for 60 sec
Impulse Voltage	6kV 1.2μs waveform
Over current withstand	30I <sub>max</sub> for 0.01s
IP grade	IP20
Constant	800~3200 imp/kWh
Pulse output	Passive pulse, pulse width is 80±5 ms
Executive standard	DIN 43880, IEC62053-21, IEC62052-11
Outline dimension LxMxH	88x75x73mm
Weight	Approx 0.3kg

### Environment

Operating temperature	-25°C~55°C
Storage temperature	-40°C~80°C
Reference temperature	23°C±2°C
Relative humidity	0 to 95%, non-condensing
Altitude	Up to 2500m
Warm up time	10s
Mechanical Environment	M1
Electromagnetic Environment	E2
Degree of pollution	2


### Wire connection

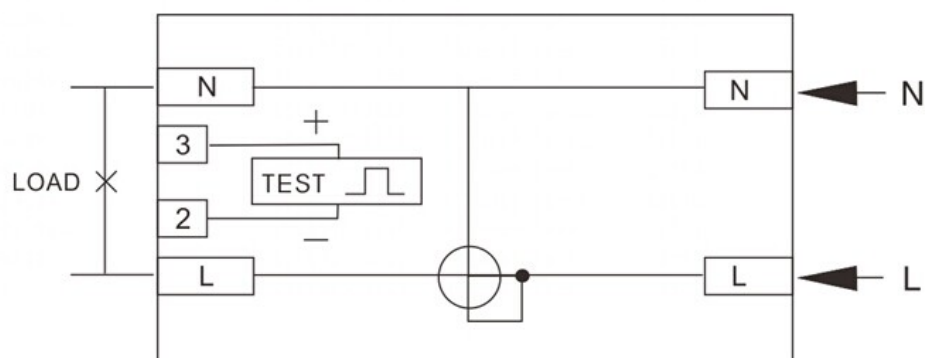

**Noting** : other voltage , current are also available . Other function also can be special design as customer requirement

**DDS238-4 (B) single phase din rail type watt hour meter (D1401)**

**Outline dimension**

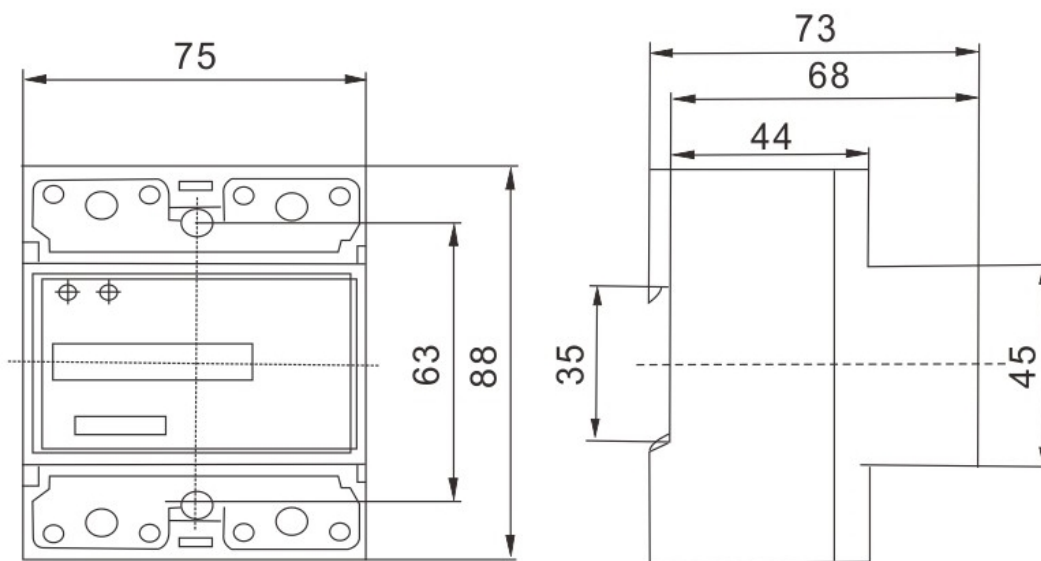

**Noting : other voltage , current are also available . Other function also can be special design as customer requirement**